


SPLENDOR+

COLLECTION

(GLOSSY)

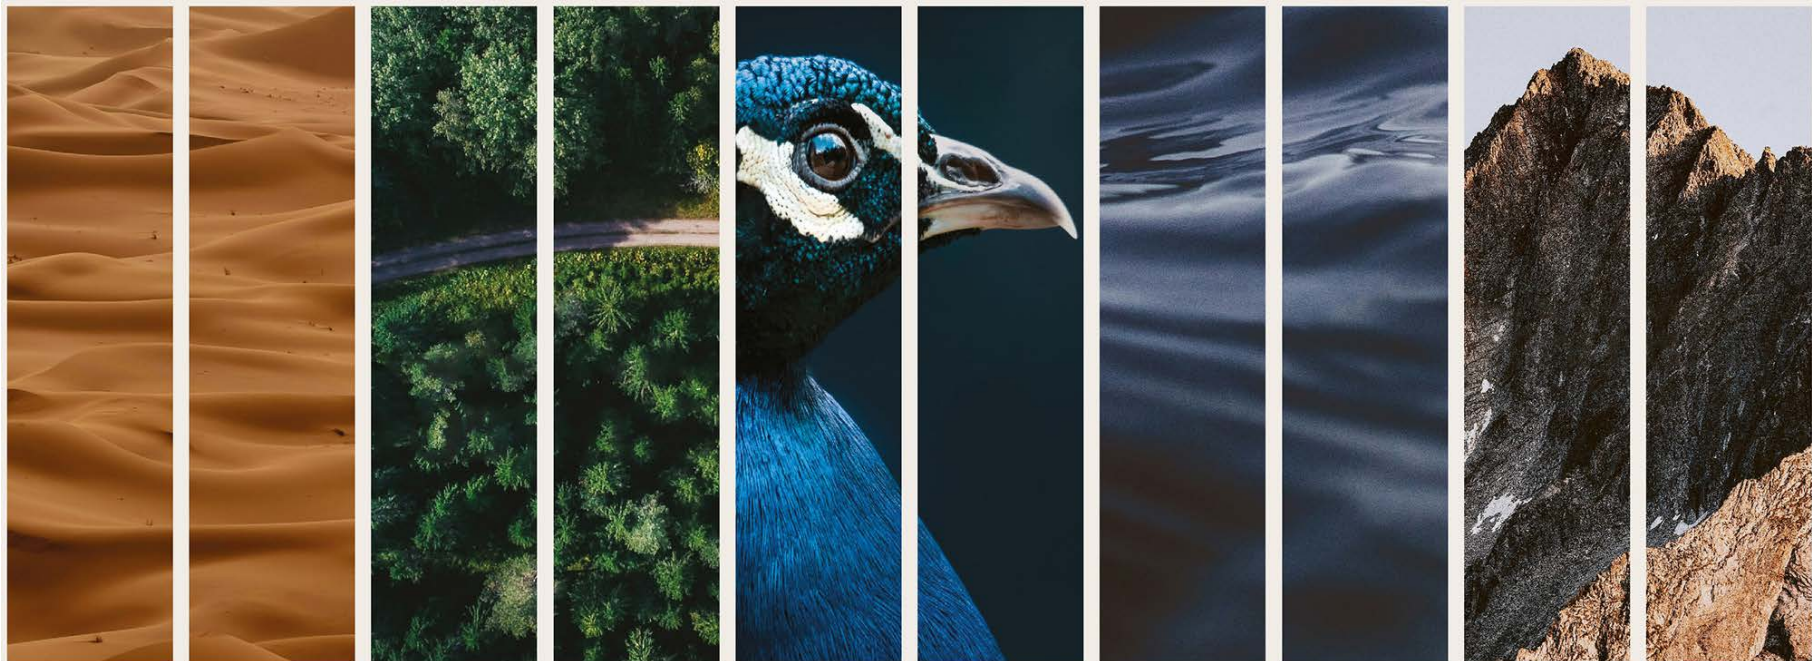

COLLECTION ' 24

CERAMIC
WALL TILES | 75X300MM

SPLENDOR+

COLLECTION

Our wall tile collection offers two sizes with sublime dimensions, featuring Splendor Punch and captivating Glossy surfaces that turn a wall into a masterpiece. Available in a range of fascinating colors, these tiles shine brilliantly, adding elegance and vibrancy to any space. Perfect for enhancing the aesthetic appeal of your home.

CERAMIC WALL TILE



75X300MM

SURFACE
GLOSSY

PUNCH
SPLENDOR



WALL
TILE



1301 DESERT BROWN



1311 FOREST GREEN



1321 PEACOCK AQUA



1331 SEABLUE



1341 STONE GREY




ROMOSO CERAMICA

DESIGN WITHOUT LIMITS

Inspired from the charm of desert

DESERT BROWN

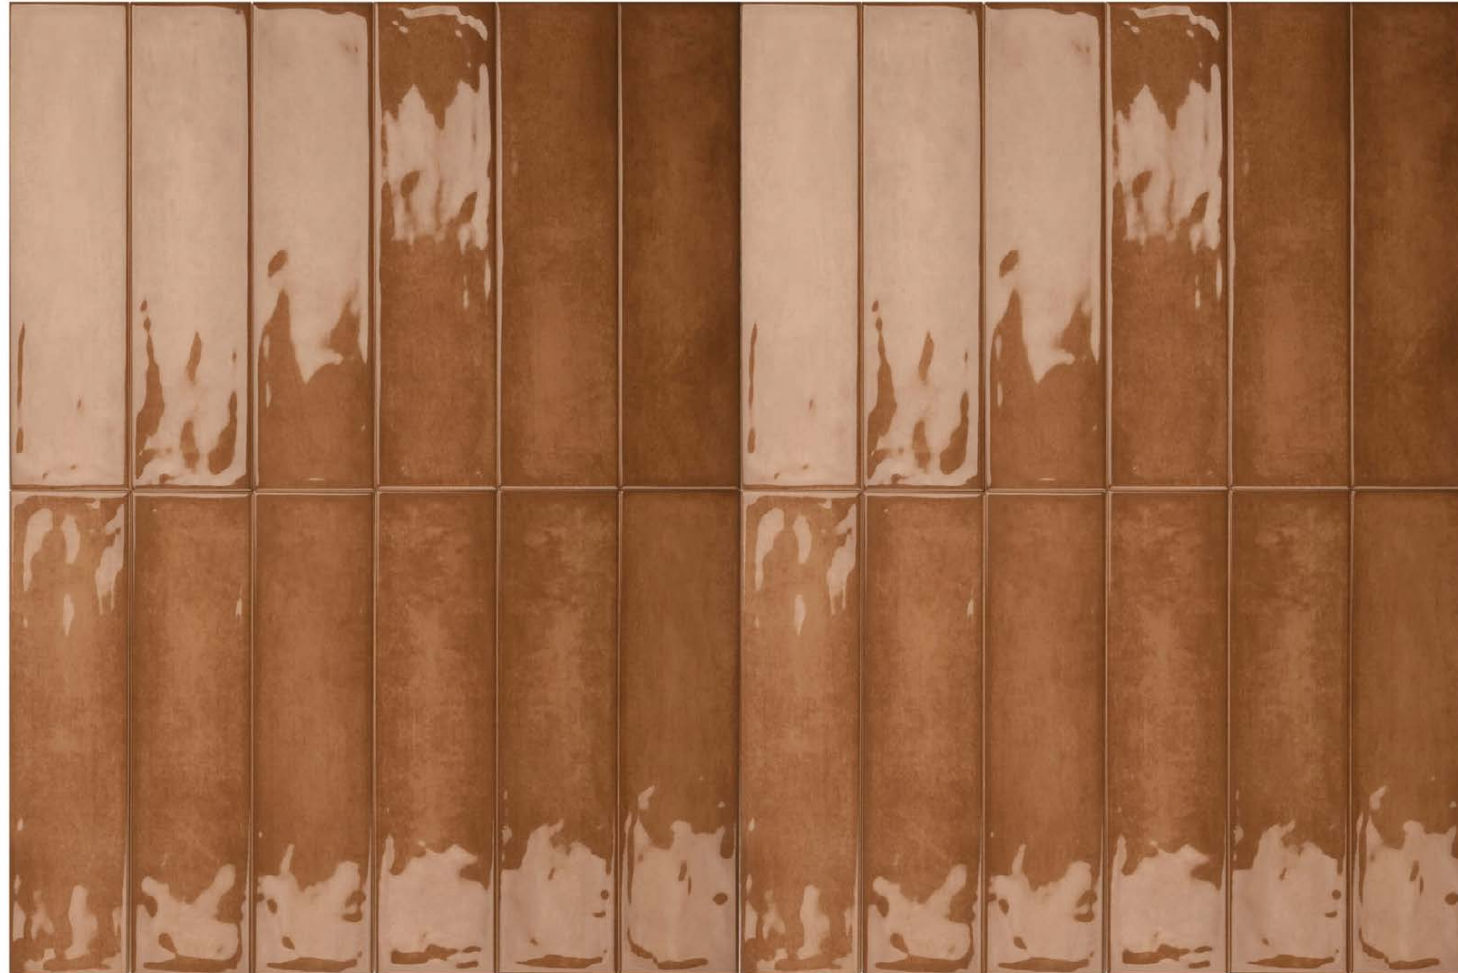


75X300MM

1301 DESERT BROWN



An aerial photograph of a dense forest, likely a coniferous forest, with a winding road or path cutting through the trees. The trees are a deep green color, and the road is a lighter, brownish-grey. The text is overlaid on the center of the image.

Inspired from the elegance of forest
FOREST GREEN

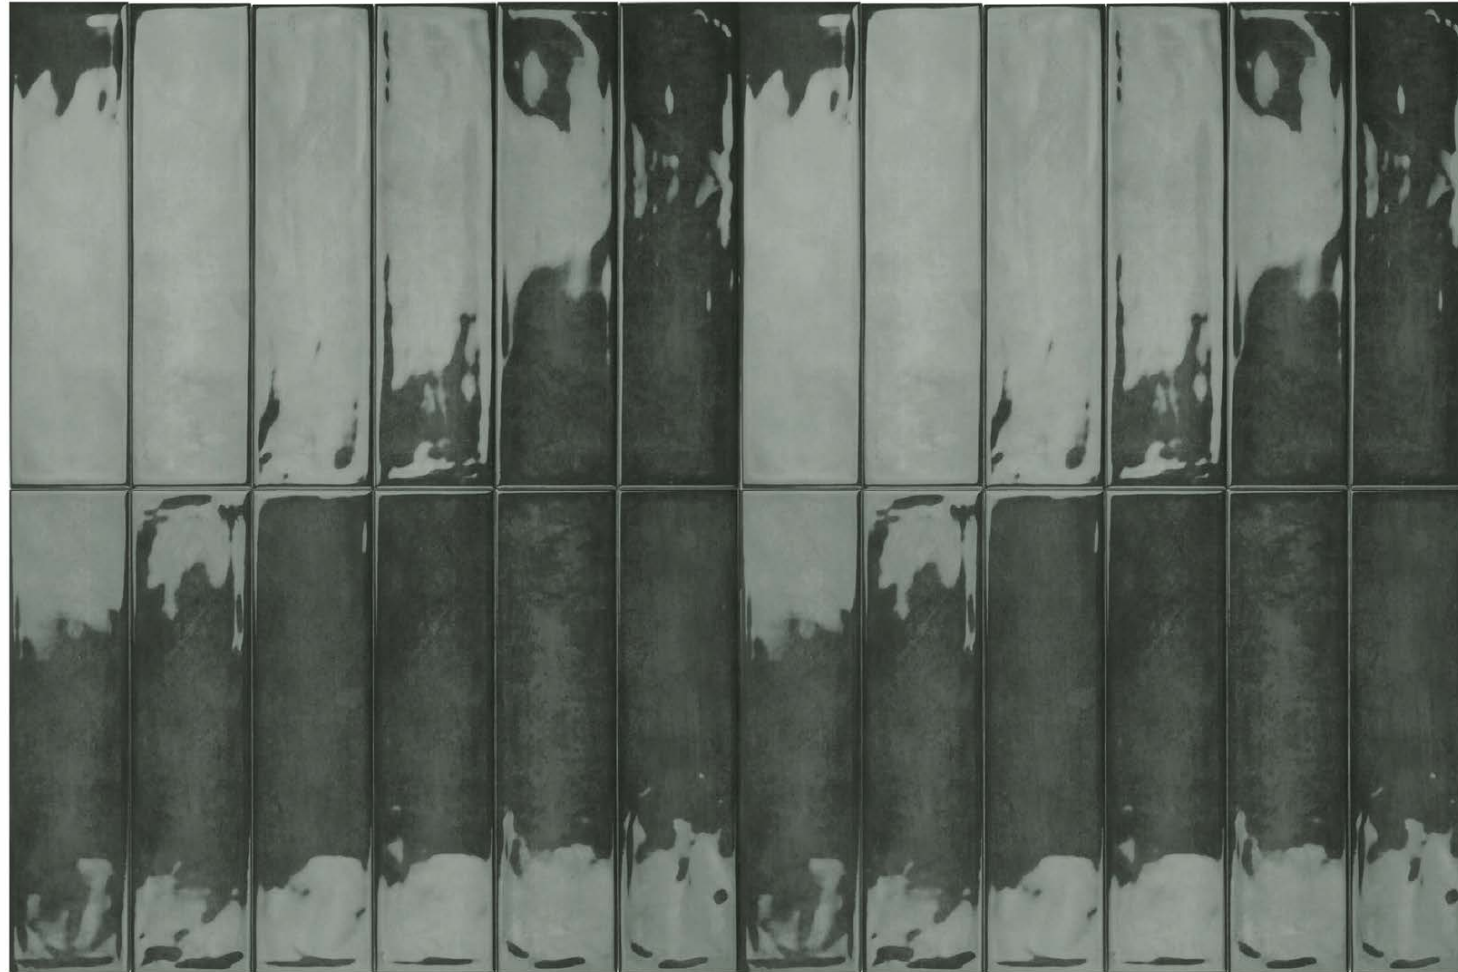

75X300MM

1311 FOREST GREEN



THE WHITE & WILLY HOTEL






Inspired from the beauty of peacock

PEACOCK AQUA



ROMOSO CERAMICA
DESIGN WITHOUT LIMITS

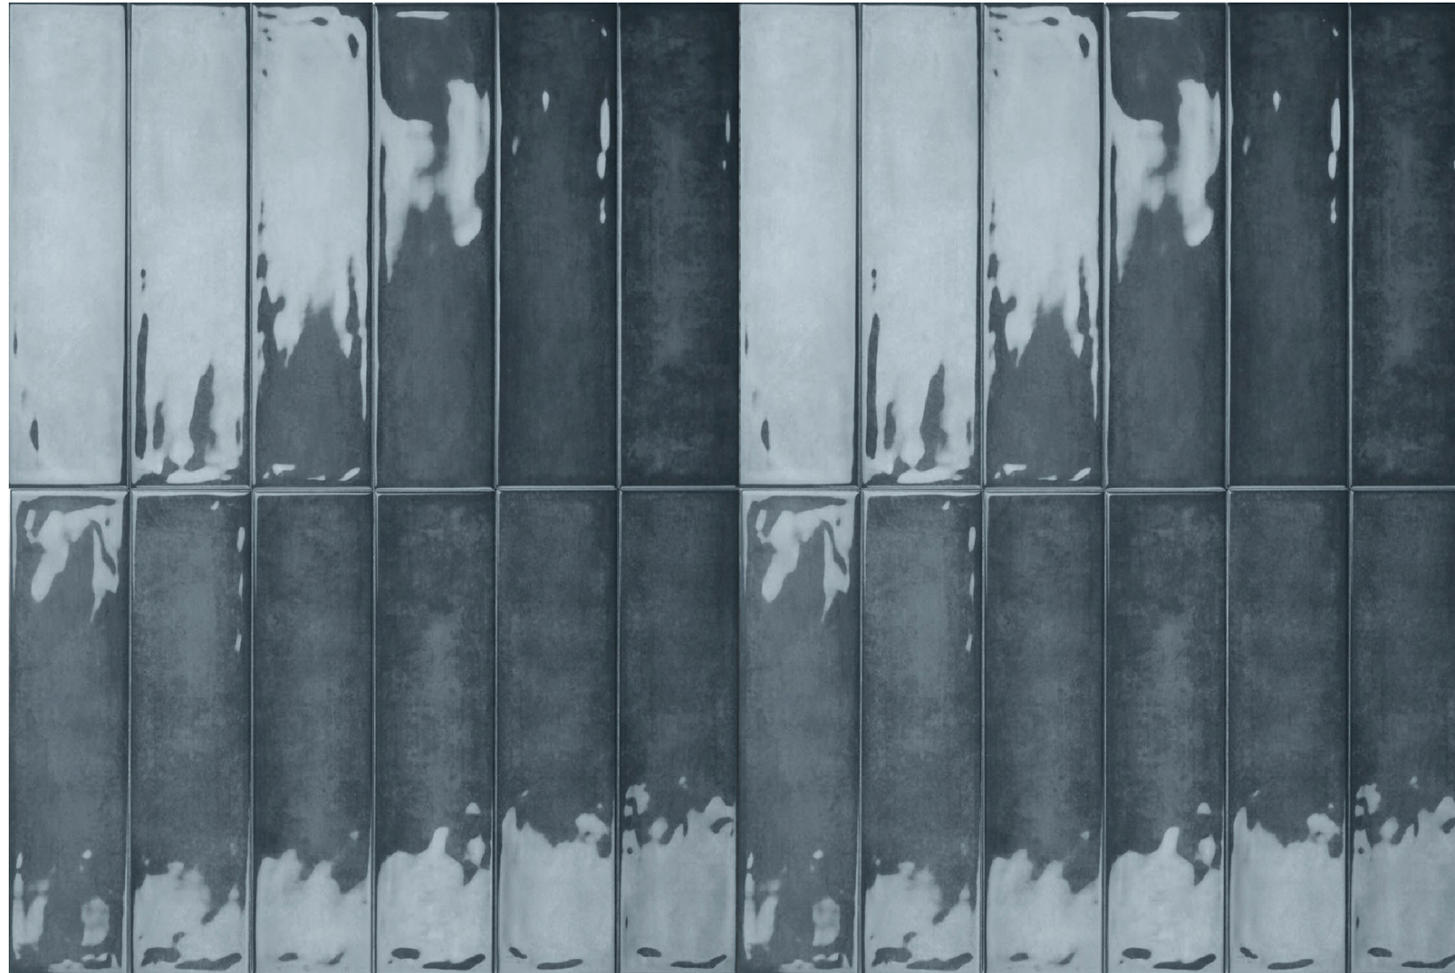

75X300MM


1321 PEACOCK AQUA







Inspired from the purity of ocean
SEA BLUE

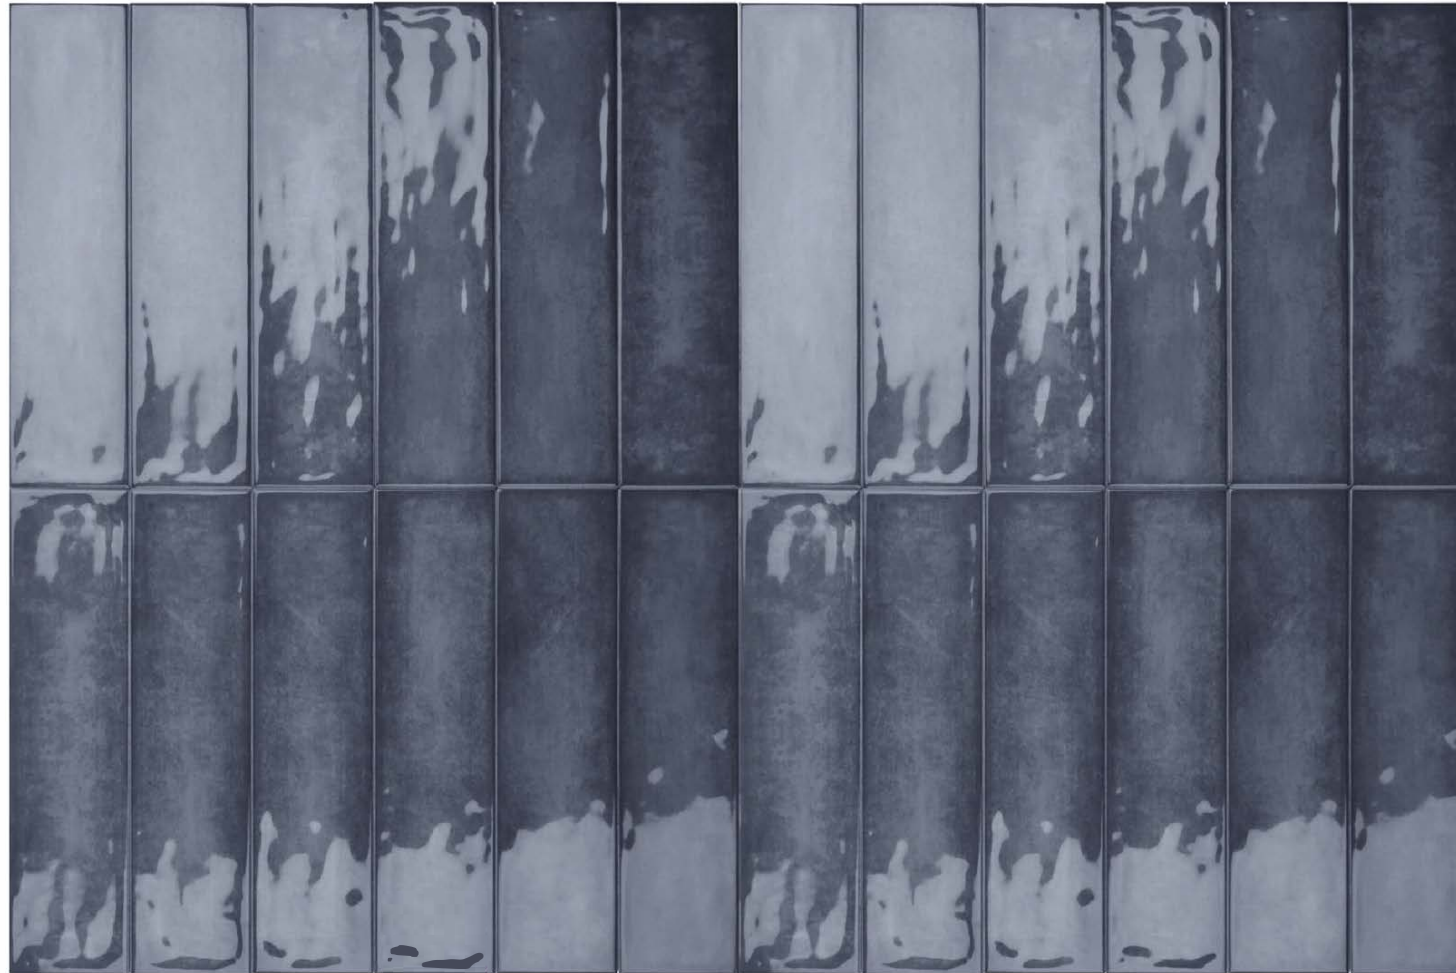

75X300MM

1331 SEABLUE







Inspired from the decorum of hills
STONE GREY



75X300MM

1341 STONE GREY



TECHNICAL SPECIFICATION as per ISO 13006:2018 – ANNEX L

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.10%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.88%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.25%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.17%	ISO-10545-2
5	Water Absorption	>10%	12.95%	ISO-10545-3
6	MOR	Minimum 15 N/mm ³	17.51 N/mm ³	ISO-10545-4
7	Breaking Strength	Not less than 200 N	508.36 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle (PASS) Fully Resistance	ISO-10545-9
13	Coefficient of Linear Thermal Expansion	Maximum 9 x 10 ⁻⁶	5.45 x 10 ⁻⁶	ISO-10545-8
14	Small colour differences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 4	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHA	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm ²	0.016mg/dm ²	ISO-10545-15

PACKAGING DETAILS

SIZE	TEXTURE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
50X250MM (2"X10")	SPLENDOR	8.00MM	22	0.25	2.70	4.00
75X300MM (3"X12")	SPLENDOR	8.00MM	44	0.99	10.66	13.300

Note :

- Size / shade variation is inherent in ceramic tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.

- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls

